

NEXT


The background of the entire page is a photograph of several stacks of white, cylindrical pipes. The pipes are arranged in a way that creates a sense of depth and repetition. Overlaid on this image are several semi-transparent blue geometric shapes, including triangles and parallelograms, which create a modern, architectural feel. The lighting is bright, casting soft shadows and highlighting the texture of the pipes.

DURALOC®

BUILT TO STAND THE TEST OF TIME

SEWER PIPES

DURALOC®

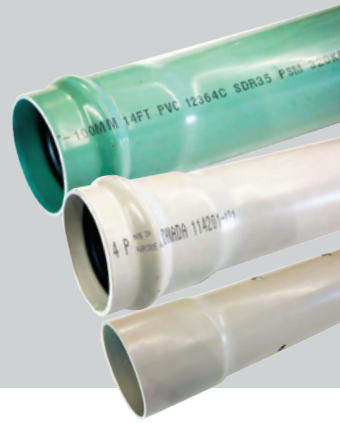

DURALOC® pipe is manufactured using a high-strength, high-impact PVC compound, providing enhanced protection against cracking, leaking, corrosion, and other threats to ensure long-lasting infrastructure. Resistant to H₂S and other aggressive chemicals commonly found in sanitary sewage, this pipe maintains its integrity over time. With a Manning coefficient of 0.009, it allows for the use of smaller diameters compared to other materials, without compromising performance.

APPLICATIONS

- Sanitary sewer
- Storm sewer
- Industrial effluent

CERTIFIED TO:



B182.2
DR 28 and DR 35 series



BNO 3624-130
4" and 6" DR 35 and all diameters of DR 28 series
BNO 3624-135
8" to 18" DR 35 and all diameters of DR 26 series

CONFORMS TO:



D3034




M278



Standard Dimension Ratio (SDR)

Colors shown represent standard products. Other colors are available upon request.

RETHINKING WATER MANAGEMENT



☎ 561-842-2743
863-357-3300

✉ info@nextinfras.com

🌐 nextinfras.com

NEXT